NL LOCK Premier II Keypad
PI80•Nx Installation

FEATURES

Battery: Accessible via a drawer at the keypad base
Finishes: Black Velvet or Bright Chrome (ABS), Satin Chrome (metal)
Enhanced Visibility: Built-in LED lights for use in low-light conditions

DIMENSIONS / MOUNTING INSTRUCTIONS

Cable hole diameter: 3/8" (.953mm) minimum

The hole must be properly deburred to avoid cable damage

The PI80 may be mounted on horizontal (9 & 3 o'clock) or vertical (12 & 6) studs.
Affix the two **#8-32** (or **M4**) mounting studs to the safe door.
Feed the cable through the cable/spindle hole on the safe door, then slide the keypad over the **#8-32 (or M4)** mounting studs and push down until it snaps on with a distinct "click."

Pull down the battery drawer at the bottom of the keypad housing. Insert a 9V battery and close the battery drawer.

Use ONLY Energizer or Duracell ALKALINE batteries.

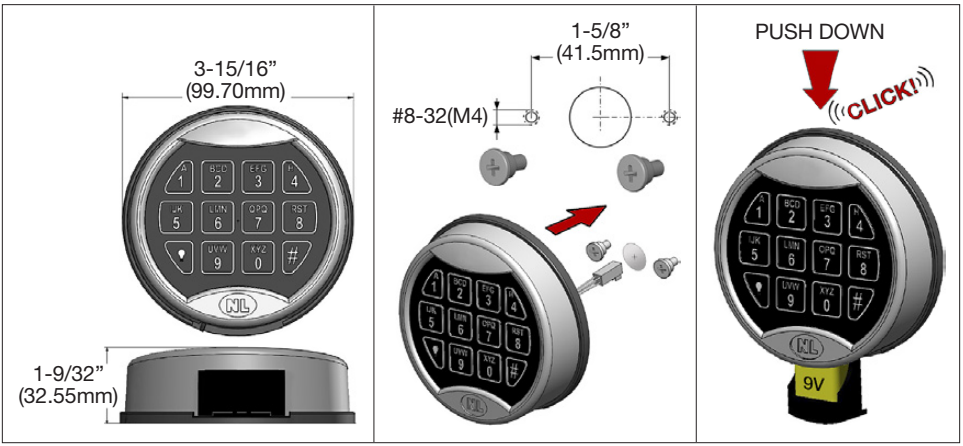

To view our full line of products, Warranty and other Instruction Manuals

PROUDLY MADE IN KENTUCKY WITH US AND GLOBAL MATERIALS

PI80•Nx Works With:

UR20 Universal RotoBolt

EM20 Large RotoBolt

EM30 MotorDrive Lock

QSecurityProducts.com
1014 S. Main Street • Nicholasville, Kentucky 40356 • **859.241.2063**

 © 2024 QSecurity Industries